

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 May 2005 (06.05.2005)

PCT

(10) International Publication Number
WO 2005/039785 A1

(51) International Patent Classification⁷:
1/40, 5/02, 5/06, E04F 11/17

B05D 1/30,

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:

PCT/NZ2004/000268

(22) International Filing Date: 28 October 2004 (28.10.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

529183

28 October 2003 (28.10.2003)

NZ

(71) Applicant (for all designated States except US):
ECOGLO LIMITED [NZ/NZ]; Level 1, 387A Colombo
Street, Christchurch_8002 (NZ).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **WATSON, Julian,**
Mark [NZ/NZ]; 129 High Street, Leeston_8151 (NZ).


Published:

— with international search report

(74) Agents: **WILSON, Kathryn, S.** et al.; Level 11, 119 Ar-
magh Street, P.O. Box 2201, Christchurch 8002 (NZ).

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: METHOD OF FORMING A SLIP-RESISTANT PHOTO-LUMINESCENT DEVICE

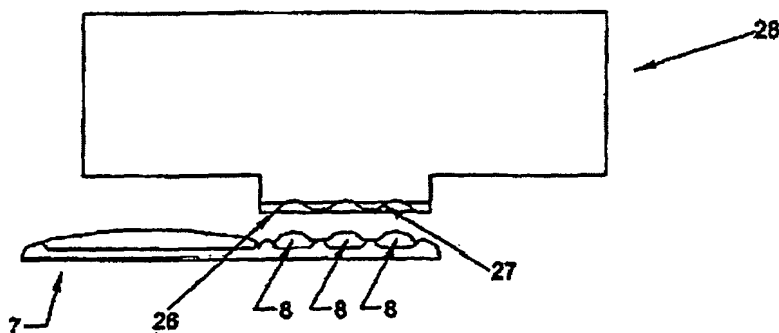

(57) Abstract: A method of manufacturing a slip-resistant photo-luminescent device includes dispensing first and second powdered components into respective recesses (8, 13) provided in a substrate (7) such as a metal strip. The first powdered component includes a resin and a friction enhancing material, the second powdered component includes a resin and a photo-luminescent pigment. The powdered components are then heated (4) to fuse the resins and bond them to surfaces of the respective recesses (8, 13). A channel (15) is formed between the first

and second recesses (8, 13) for receiving traces of the first and second components that may spill from the adjacent recesses.